

Airflow®

CLIPSAL®

by Schneider Electric

Add a little Sunshine to your bathroom



clipsal.com




Airflow Sunshine 2 x 275W heat-lamp model 6600A

The 6600A is suitable for small bathrooms and en suites with ceilings of average height 2.7 metres (9 feet). The 6600A is also suited to small kitchens, toilets and laundries.

Included in these neat and compact 3-in-1 combination units are two 275W radiant heat globes, one 14W CFL central reflector globe and a high performance exhaust fan.

Features

- Attractive design
- Economical operation
- 2 x 275W radiant heat lamps with ceramic lamp holders
- 14W CFL centre light for improved brightness
- Exhaust fan with ball bearing motor
- Clipsal 2000 Series wall switch and architrave plate
- Switch mechanisms clearly labelled for easy identification
- Double insulated




Airflow Sunshine 4 x 275W heat-lamp model 6500A

The 6500A is designed for bathrooms with ceilings up to 2.7 metres (9 feet) in height. Features include four 275W globes for powerful, instant heat, an 11W CFL globe for superior lighting, a powerful exhaust fan and the slimline grille that not only looks attractive, but improves exhaust performance too.

The 6000 Series 3-in-1 offers maximum comfort and convenience in an attractive slimline unit that is easy to install and economical to run.

Features

- Attractive slimline design
- Economical operation
- 4 x 275W heat lamps with ceramic lamp holders
- Two heat settings
- An 11W centre lamp for optimum brightness
- Powerful ball bearing exhaust fan for increased air movement
- Clipsal 2000 Series wall switch
- Switch mechanisms clearly labelled for easy identification
- Spring loaded clamps for easy installation




Airflow Sunshine 2 x 275W heat-lamp model 7600ATP

The 7600 Series is ideal for smaller bathrooms with restricted ceiling space above 215mm. Standard features include 2 x 275W radiant heat lamps with ceramic holders and a 60W centre lamp, a powerful centrifugal exhaust fan and 2000 Series labelled wall switches for easy identification.

Features

- Attractive modern design
- Efficient and economical operation
- Built-in thermal protection for added safety
- 2 x 275W radiant heat lamps with ceramic lamp holders
- One heat setting
- R80 60W centre lamp
- 3m x 150mm ducting
- Ball bearing motor and centrifugal fan for ventilation through ducting
- Clipsal 2000 Series labelled wall switches, grid plate and cover included
- Side connected ducting for ceiling cavities above 215mm
- Wall/eaves outlet included
- Complies with Building Code of Australia

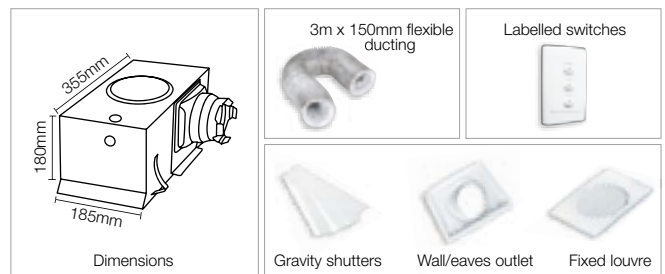

Airflow Sunshine 4 x 275W heat-lamp model 7500ATP


The 7500 Series is ideal for bathrooms with restricted ceiling cavities above 230mm.

Like the 7600 Series, the 7500 Series comes with an innovative side connect ducting, which enables air to be directed outside through a wall/eaves outlet.

Standard features include 4 x 275W radiant heat lamps, a 100W centre lamp, built-in thermal protection and a powerful centrifugal exhaust, which provides superior air movement.

Features

- Attractive modern design
- Efficient and economical operation
- Built-in thermal protection for added safety
- 4 x 275W radiant heat lamps with ceramic lamp holders
- One heat setting
- R80 100W centre lamp
- 3m x 150mm ducting
- Ball bearing motor and centrifugal fan for ventilation through ducting
- Clipsal 2000 Series labelled wall switches, grid plate and cover included
- Side connected ducting for ceiling cavities above 230mm
- Wall/eaves outlet included
- Complies with Building Code of Australia

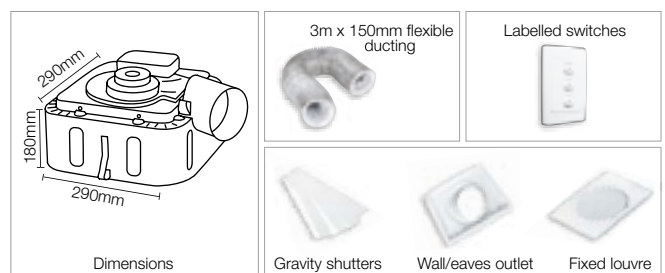

Airflow Fan/Light/Heater Units

Add a little Sunshine to your bathroom

Say goodbye to foggy mirrors and cold, dim, steam-filled bathrooms every winter. An Airflow Sunshine 3-in-1 will provide your bathroom with fresh, clear air, bright light and gentle radiant heat in one compact and stylish design.

Multiple choice

Four models in two designs are offered in the Sunshine range. A two heat lamp design for use in en suites and a four heat lamp design for use in main bathrooms.

Easy to clean

The 7000 Series is designed with large flat surfaces and the 6000 Series has a unique linear grille. They are both easy to clean and prevent excessive dust build-up.

Where to locate

Radiant lamp heaters are not designed to heat entire rooms, but to provide instant and concentrated heat directly below. Always locate a Sunshine bathroom 3-in-1 where drying off takes place and not directly over the shower or bath.

Great in tight spaces

For bathrooms with restricted ceiling spaces, the 7000 Series models include side connection flexible ducting. This extracts steam and air outside, preventing moisture damage.

Safe to use

All products have heat resistant ceramic lamp holders and the 7000 Series has an all-metal body to provide you with total peace of mind. For added safety, the 7000 Series exhaust fan automatically turns on whenever the heat-lamps are in use to prevent heat build-up.

The 7000 Series also come with built-in thermal protection – a temperature sensor that instantly turns off the heat lamps should the unit ever overheat. However, the exhaust fan will stay on to cool the unit down, while the centre light can still be used so you're never left in the dark.

Simple to install

Each 7000 Series model is supplied with a ventilation outlet designed for easy installation on walls or under eaves. Outlets can be fitted with insect screens, automatic shutters and fixed louvres. Ask your electrical contractor about the option that's right for you.

Protect the environment

Although Sunshine 3-in-1s are economical to run, it is recommended that heat lamps operate for no more than 15 minutes at a time, to save electricity and to help protect the environment.

Warranty and replacement lamps

Airflow Sunshine 3-in-1s are backed by a three-year warranty, while the lamps are covered for one year. Airflow replacement heat lamps and light globes are also available. Use only approved Airflow replacement lamps, otherwise the warranty is void.

Cat No.	Description
6600HL275	275W ES Heat Lamp
6600L11	11W ES CFL
6600L14	14W ES CFL



6600A




6500A



7600ATP



7500ATP

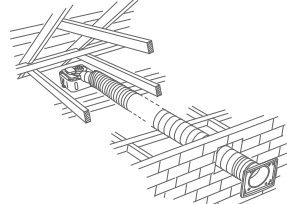Specifications				
Cat No.	6600A	6500A	7600ATP,WE	7500ATP,WE
Air-Movement (exhaust fan)	338m ³ /h (94 1/2sec)	338m ³ /h (94 1/2sec)	125m ³ /hr (34.7 1/2sec)	125m ³ /hr (34.7 1/2sec)
Flexible Ducting			3m x 150mm dia foil type	3m x 150mm dia foil type
Lamp Holders	Ceramic Edison screw	Ceramic Edison screw	Ceramic Edison screw	Ceramic Edison screw
Backdraught Shutter			Built-in	Built-in
Heat-Lamps	2 x 275 Watt ES	4 x 275 Watt ES	2 x 275W ES	4 x 275W ES
Centre Lamp	14W CFL	11W CFL	60W ES reflector lamp	100W ES reflector lamp
Minimum Ceiling Cavity	500mm	500mm	215mm	230mm
Fan Type	C-Frame	C-Frame	Centrifugal design	Centrifugal design
Rated Voltage	240V a.c. 50Hz	240V a.c. 50Hz	240V a.c. 50Hz	240V a.c. 50Hz
Watts	600 Watts	1250 Watts	580W – 630W	1140W – 1240W
Motor Type	Double insulated ball bearing	Double insulated ball bearing	Double insulated ball bearing	Double insulated ball bearing
Body	High temperature, flame retardant Polypropylene	Mild steel & powdercoated	Mild steel (painted)	Mild steel (painted)
Fascia	High temperature polycarbonate	High temperature polycarbonate	High-temp polycarbonate	High-temp polycarbonate
Switches	Clipsal 2000 Series wall & architrave plates in White Electric with separate heater, fan & light switch mechanisms	Clipsal 2000 Series wall plate in White Electric with separate fan, light & two heat switch mechanisms	Clipsal 2000 Series wall plate in White Electric with separate HEAT, LIGHT and FAN labelled switch mechanisms	Clipsal 2000 Series wall plate in White Electric with separate HEAT, LIGHT and FAN labelled switch mechanisms
Outlet			Wall/eaves outlet with gravity shutters, insect screen and fixed louvre options included (white colour)	Wall/eaves outlet with gravity shutters, insect screen and fixed louvre options included (white colour)
Warranty	5 years	5 years	3 years	3 years
Lamp Warranty	12 months	12 months	12 months	12 months
Recommended Operation	Operate heat-lamps for a max. of 15 minutes at a time	Operate heat-lamps for a max. of 15 minutes at a time	Operate heat-lamps for a max. of 15 minutes at a time	Operate heat-lamps for a max. of 15 minutes at a time
Thermal Protection			Temperature sensor automatically turns off heat lamps if overheating is detected. Exhaust fan and centre light continue to operate	Temperature sensor automatically turns off heat lamps if overheating is detected. Exhaust fan and centre light continue to operate
Installation Diagram				

Schneider Electric (Australia) Pty Ltd

33-37 Port Wakefield Road, Gepps Cross
South Australia 5094

PO Box 132, Enfield Plaza,
South Australia 5085

clipsal.com

Website: clipsal.com
Contact us: clipsal.com/feedback

**National Customer Care Enquiries:
1300 2025 25**

Schneider Electric (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© 2011 Schneider Electric. All Rights Reserved.

Trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.

 printed on recycled paper